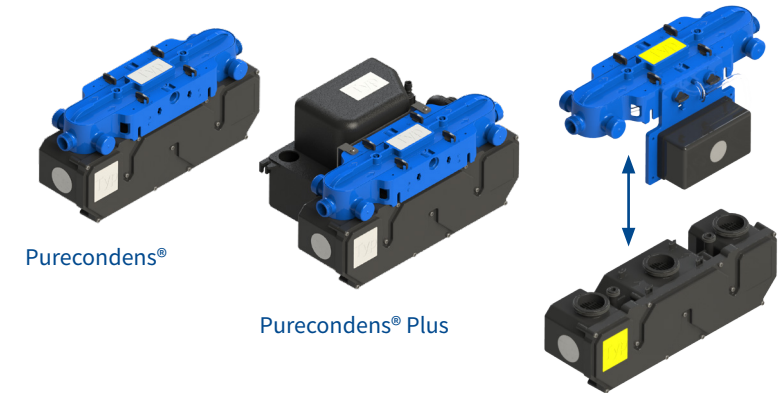







Purecondens® - Purecondens® Plus

Neutralisation system for floor-standing gas and oil condensing units up to 1200kW






The Purecondens® neutralisation neutralises condensate from gas and oil condensing units, so that it does not destroy the sewage system and subsequently the environment. Thanks to the integrated cartridge, the Purecondens® is easy and convenient to maintain. The Purecondens® is available with and without a feed pump.



Purecondens® for Gas heaters

Products Gas	Perfor- mance heaters	Car- trid- ges	integr. Air- pump	Height inlet/ outlet	Dimensi- ons	Article number
 Purecondens® Gas 100 (Plus)	up to 100 kW	1 pcs.	no	128 mm / 128 mm	L: 355 mm W: 100 mm H: 170 mm	1001460 (without Pump) 1001530 (with Pump)
 Purecondens® Gas 400 (Plus)	up to 400 kW	1 pcs.	yes	128 mm / 128 mm	L: 355 mm W: 160 mm H: 170 mm	1001461 (without Pump) 1001531 (with Pump)
 Purecondens® Gas 800 (Plus)	up to 800 kW	2 pcs.	yes	128 mm / 128 mm	L: 355 mm W: 270 mm H: 170 mm	1001462 (without Pump) 1001532 (with Pump)
 Purecondens® Gas 1200 (Plus)	up to 1200 kW	3 pcs.	yes	128 mm / 128 mm	L: 355 mm W: 370 mm H: 170 mm	1001463 (without Pump) 1001533 (with Pump)
 Replacement cartridge Purecondens® Gas						1001466

Purecondens® for Oil heaters

Products Oil	Perfor- mance heaters	Car- trid- ges	integr. Air- pump	Height inlet/ outlet	Dimensi- ons	Article number
 Purecondens® Oil 25 (Plus)	up to 25 kW	1 pcs.	no	128 mm / Pump	L: 355 mm W: 100 mm H: 170 mm	1001464 (without Pump) 1001534 (with Pump)
 Purecondens® Oil 200 (Plus)	up to 200 kW	1 pcs.	yes	128 mm / Pump	L: 355 mm W: 160 mm H: 170 mm	1001761 (without Pump) 1001764 (with Pump)
 Purecondens® Oil 400 (Plus)	up to 400 kW	2 pcs.	yes	128 mm / Pump	L: 355 mm W: 270 mm H: 170 mm	1001762 (without Pump) 1001765 (with Pump)
 Purecondens® Oil 600 (Plus)	up to 600 kW	3 pcs.	yes	128 mm / Pump	L: 355 mm W: 370 mm H: 170 mm	1001763 (without Pump) 1001766 (with Pump)
 Replacement Cartridge Purecondens® Oil						1001467

Your benefits with Purecondens® at a glance

- **Plug & Play:**
The Purecondens® can be combined with all gas and oil condensing units. It is available with and without feed pump.
- **Certification:**
The Purecondens® has been tested in accordance with the DVGW VP 114 directive and is CE-certified.
- **Recycling:**
The Purecondens® is easy to maintain thanks to the cartridge system: remove the used cartridge, fit a new cartridge. The used cartridge can be returned to Powercondens for reconditioning.